



# IEEE International Black Sea Conference on Communications and Networking

## Understanding the Performance of TCP BBRv2 using FABRIC

Jose Gomez\*, Elie Kfoury\*, Jorge Crichigno\*, Gautam Srivastava†

\*University of South Carolina, United States

†Brandon University, Canada


4–7 July 2023, Istanbul, Türkiye

# Agenda

- TCP Traditional Congestion Control Algorithms
- BBR: Model-based Congestion Control
- Motivation
- Experimental Setup
- Results and Evaluations
- Lessons Learned

# TCP Traditional Congestion Control



- The principles of window-based congestion control (CC) were described in the 1980s<sup>1</sup>
- Traditional CC algorithms follow the additive-increase multiplicative-decrease (AIMD) form of congestion control

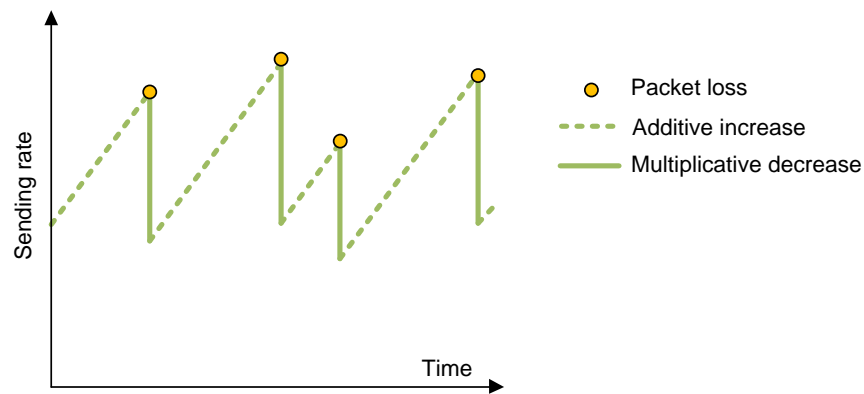

1. V. Jacobson, M. Karels, Congestion avoidance and control, ACM SIGCOMM Computer Communication Review 18 (4) (1988).

# TCP Traditional Congestion Control



- The principles of window-based congestion control (CC) were described in the 1980s<sup>1</sup>
- Traditional CC algorithms follow the additive-increase multiplicative-decrease (AIMD) form of congestion control

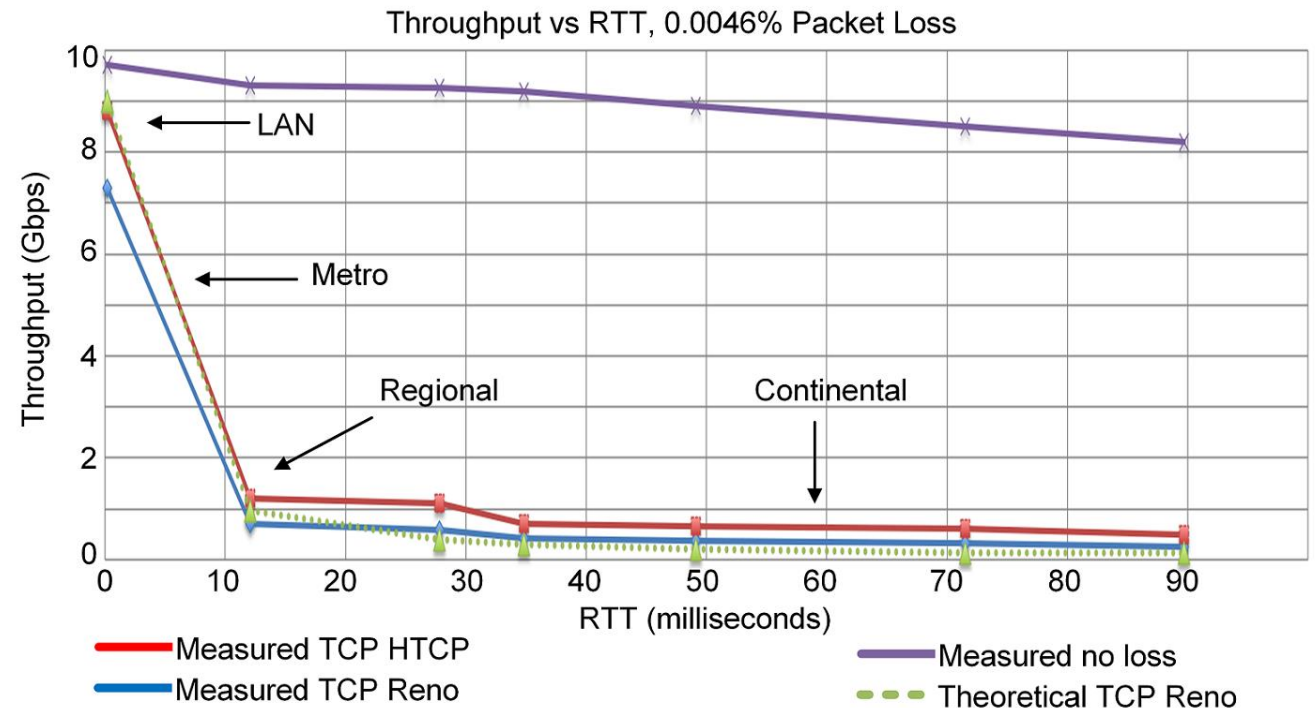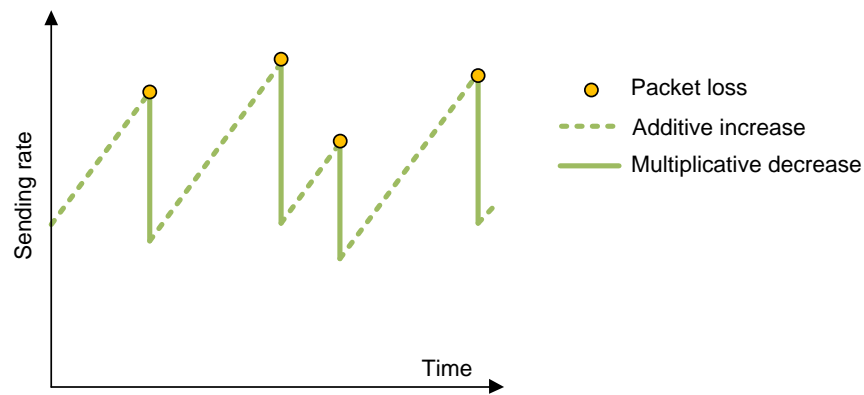

1. V. Jacobson, M. Karels, Congestion avoidance and control, ACM SIGCOMM Computer Communication Review 18 (4) (1988).

# BBR: Model-based Congestion Control


- TCP Bottleneck Bandwidth and RTT (BBR) is a rate-based CC algorithm<sup>1</sup>
- BBR represented a disruption to the traditional CC algorithms:
  - It is not governed by AIMD control law
  - It does not use packet loss as a signal of congestion
- At any time, a TCP connection has one slowest link bottleneck bandwidth (btlbw)

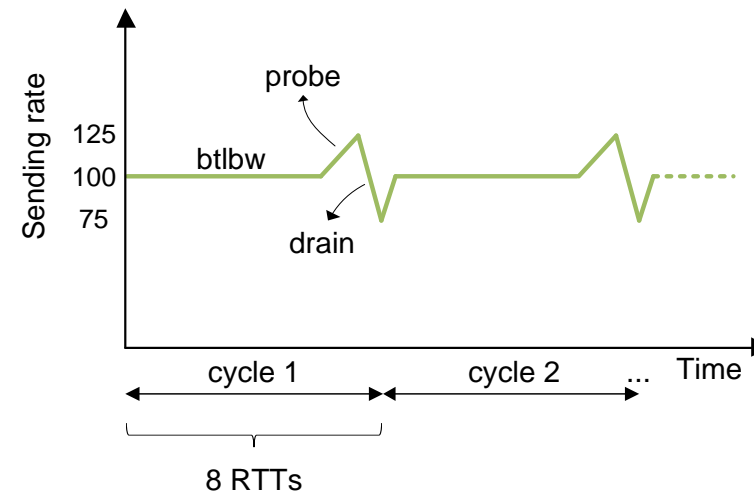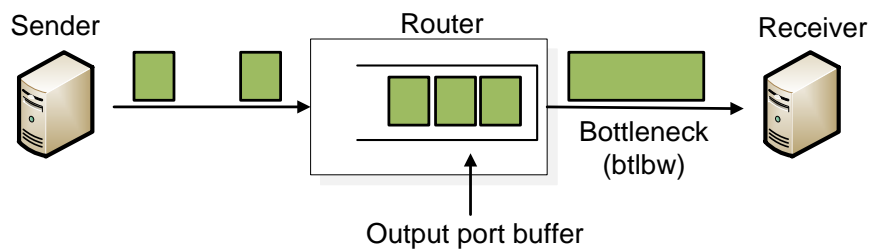

1. N. Cardwell et al. "BBR v2, A Model-based Congestion Control." IETF 104, March 2019.


# BBRv2

- BBRv2 overcomes the shortcomings of BBRv1
- BBRv2 measures the bandwidth, the RTT, the packet loss rate, and the ECN mark rate
- The measurements are used to estimate the bandwidth-delay product (BDP)
- BBRv2 does not always apply a multiplicative decrease for every round trip where packet loss occurs

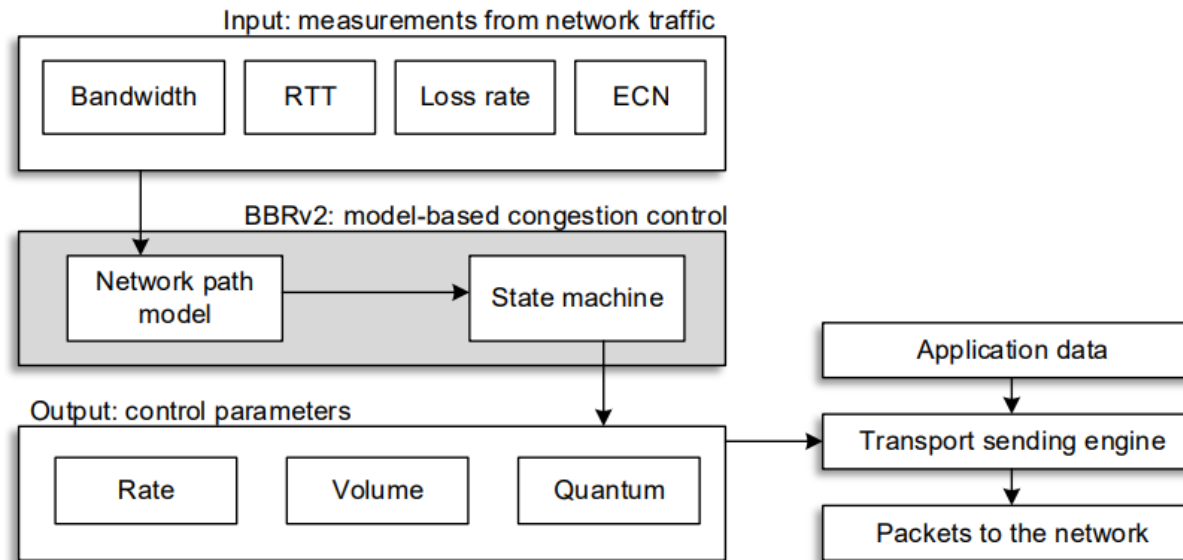


# Motivation

- Understanding the behavior of BBRv2 in a testbed with real propagation delay
- Observing the dynamics of BBRv2 in a Wide Area Network (WAN)
- Analyzing the differences between an emulated environment and a real testbed
- This work leverages the distributed architecture of the FABRIC testbed to reproduce WAN conditions and test the performance of BBRv2

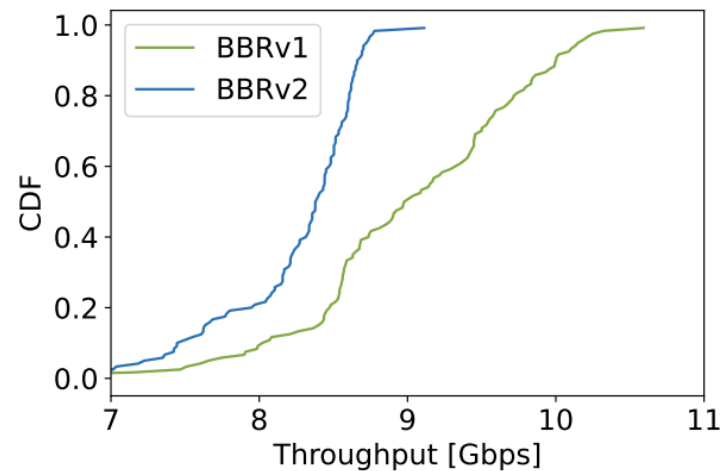

(a)

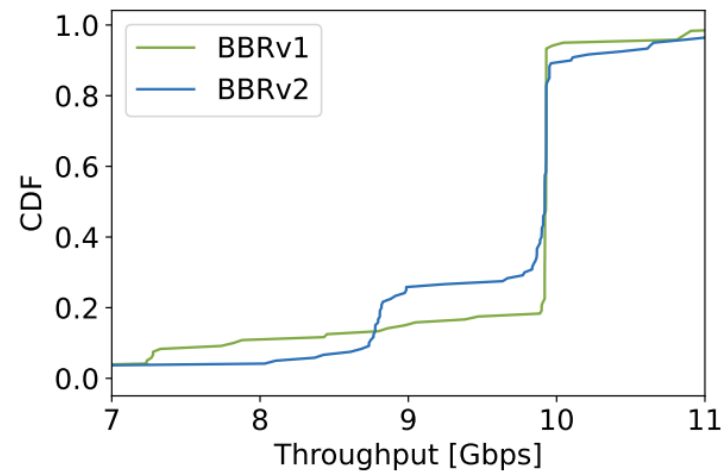


(b)

CDF of the bottleneck bandwidth estimation of BBRv1 and BBRv2.  
(a) with 45ms emulated delay. (b) with 45ms propagation delay.

# FABRIC


- FABRIC is an NSF-funded international infrastructure for at-scale experimentation and research
- Areas include networking, cyber, distributed computing, storage, 5G, ML, and others
- The FABRIC equipment is located at commercial collocation spaces, U.S. national labs, and campuses – 29 FABRIC sites

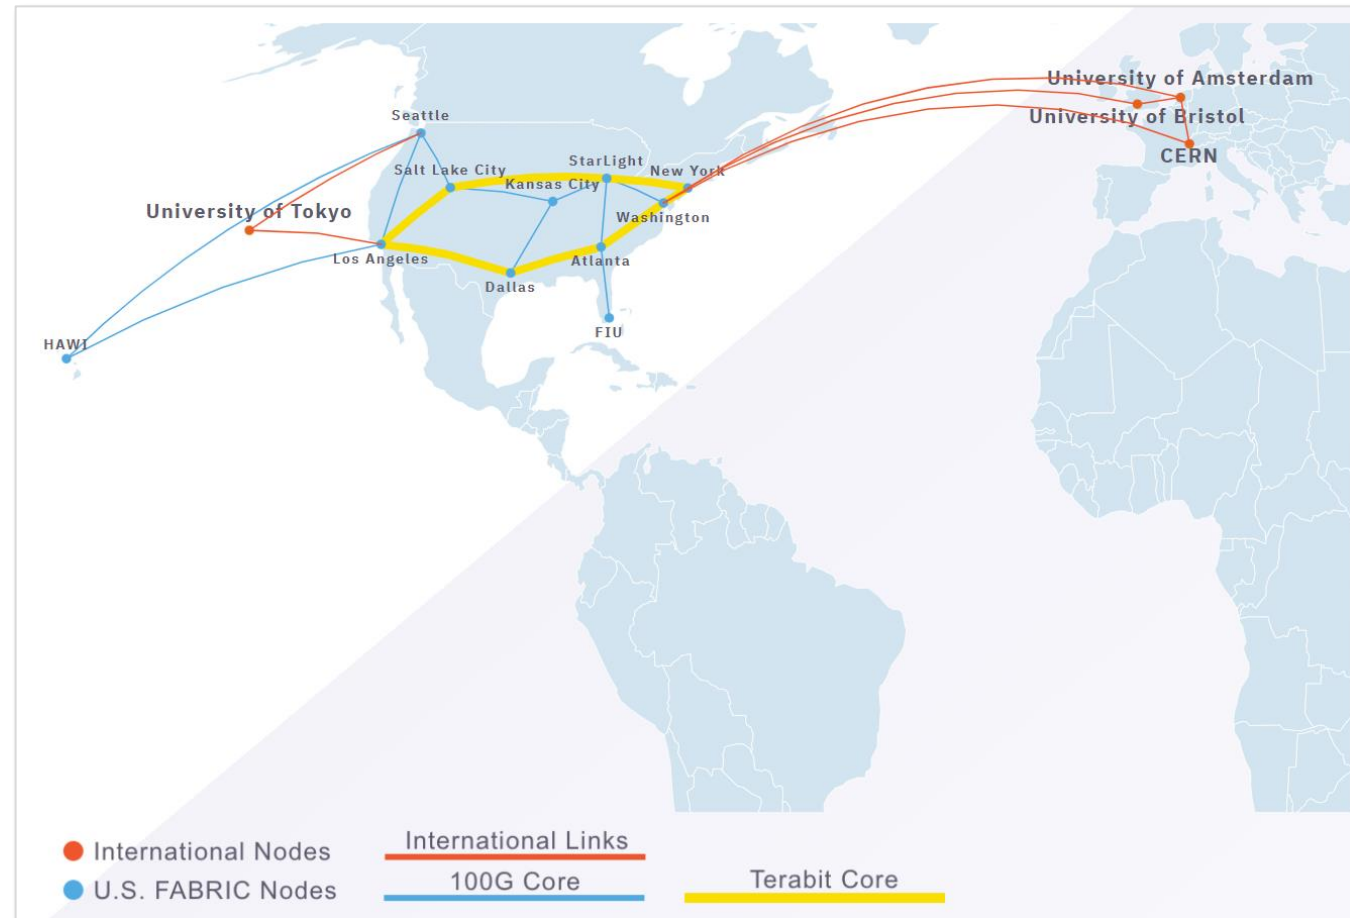




# Experimental Setup

- The experiments used a software switch to limit the rate and emulate packet losses
- The rate is limited using the Token Bucket Filter (TBF) in Linux
- Packet losses are emulated using NETEM
- The sites are selected based on the experiment

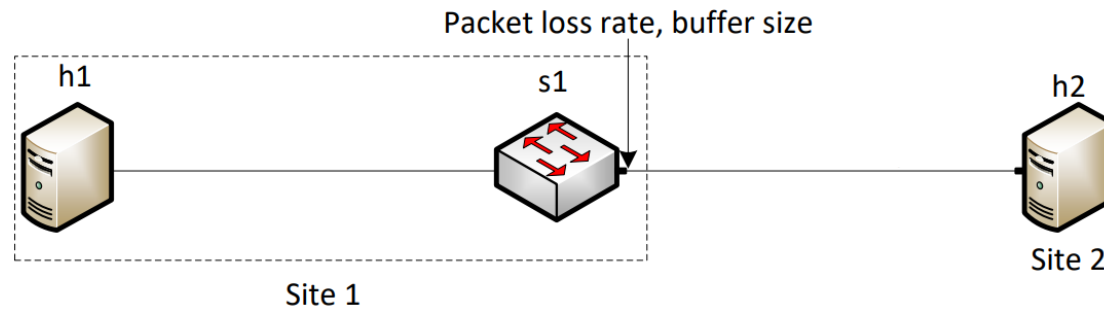


# Results and Evaluations

- Experiment 1: Performance in a WAN with packet losses
- The rate is limited to 10Gbps
- The emulated packet loss rate is 0.0046% (i.e., 1/22,000)

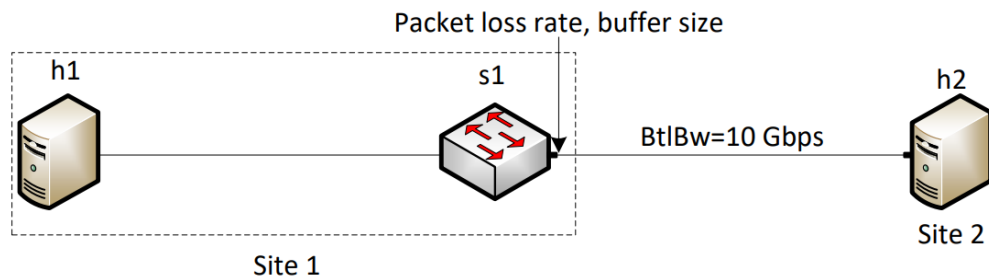


Site 1	Site 2	RTT
TACC (TX)	TACC (TX)	0.3ms
DALL (TX)	TACC (TX)	6ms
DALL (TX)	WASH (DC)	27ms
SALT (UT)	FIU (FL)	44ms
GPN (MO)	DALL (TX)	61ms
UTAH (UT)	WASH (DC)	72ms
GPN (MO)	FIU (FL)	113ms

Topology used for the evaluations

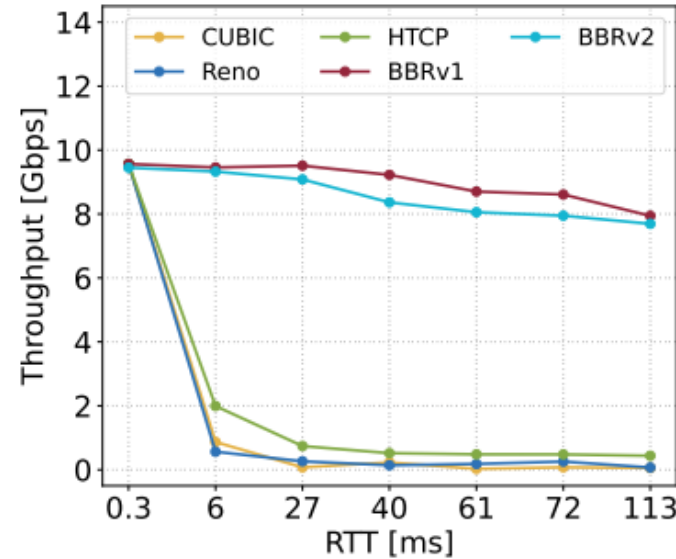

(a)

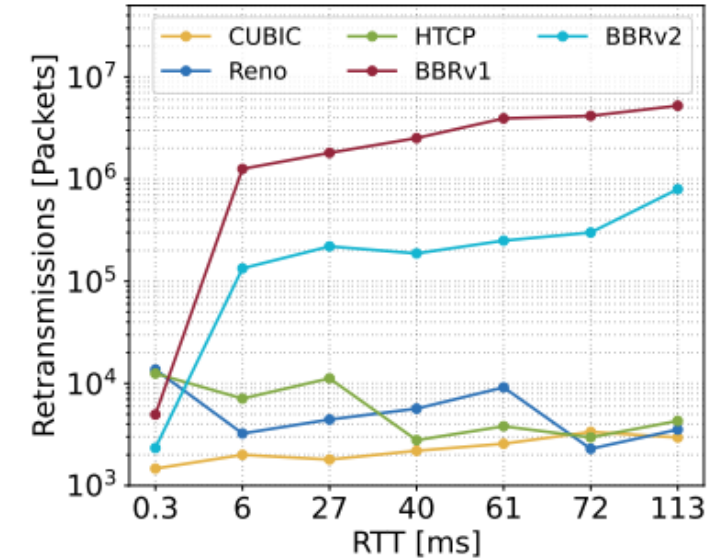


(b)


Performance of CUBIC, Reno, HTCP, BBRv1, and BBRv2 as a function of the RTT. (a) Throughput. (b) Retransmissions.

# Results and Evaluations

- Experiment 2: Retransmissions as a function of the buffer size
- The RTT between the hosts is 45 milliseconds (SALT, FIU)
- BBRv2 presents lower packet loss rates than BBRv1

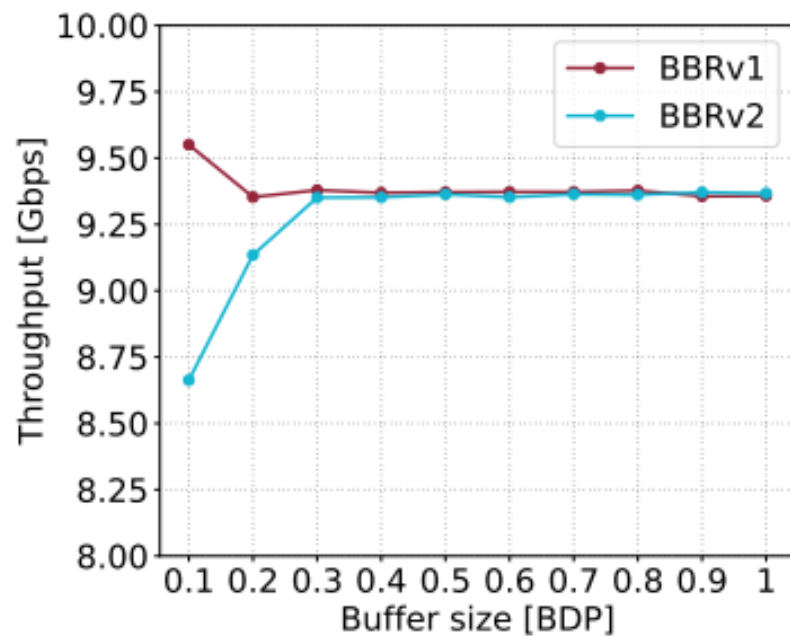

(a)

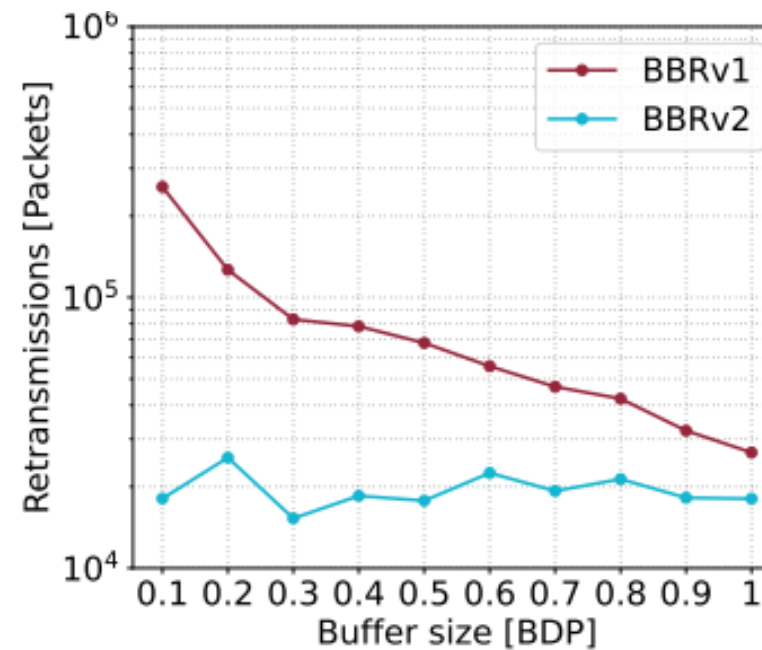


(b)


Performance test as a function of the BDP. (a) Throughput. (b) Retransmissions.

# Results and Evaluations

- Experiment 3: RTT unfairness
- RTT unfairness occurs when flows with smaller RTTs obtain a higher throughput
- BBRv1 flows present the opposite behavior
- BBRv2 reduces the RTT unfairness of competing flows

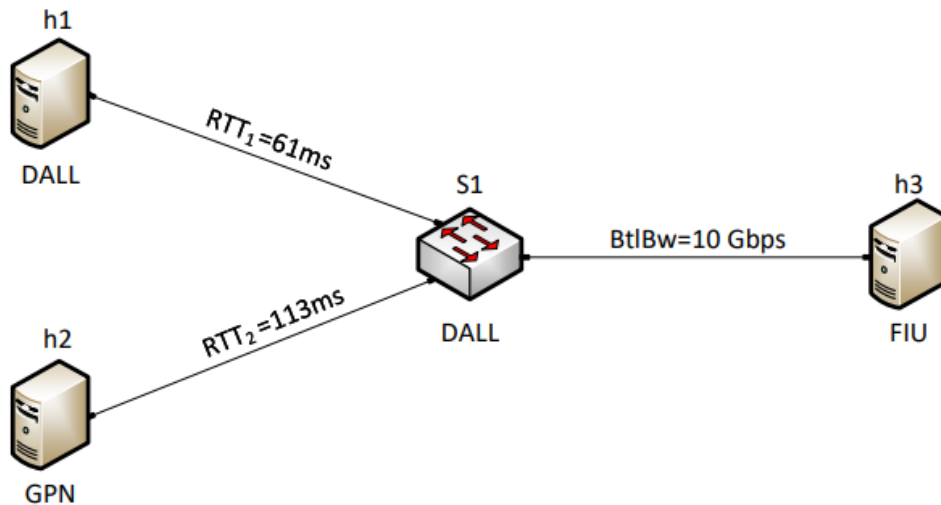

Topology used for running the RTT unfairness experiment

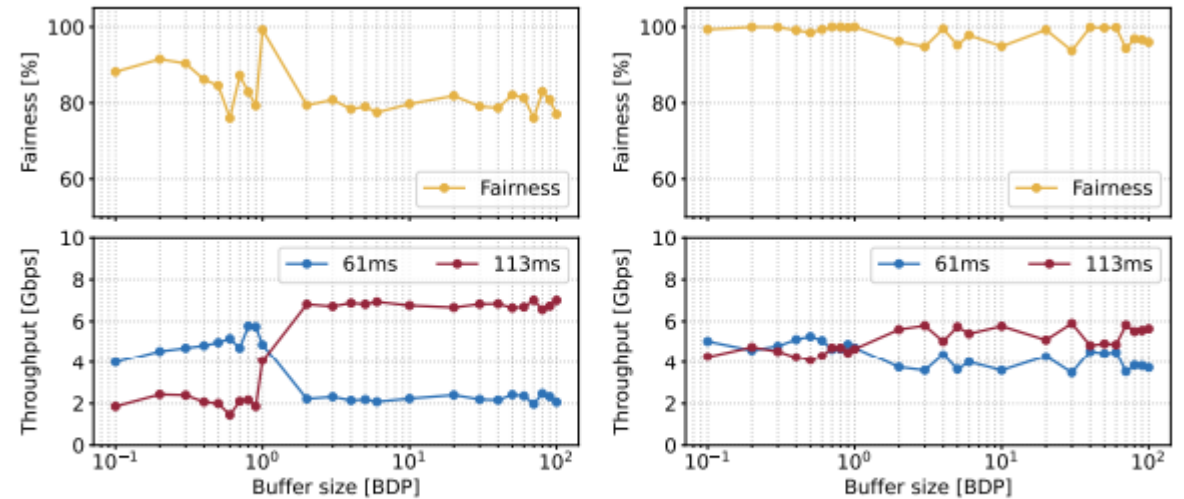

Fairness index and throughput as functions of the buffer size for two competing flows. (a) BBRv1. (b) BBRv2.

# Results and Evaluations

- Experiment 4: Parallel streams and different MTUs
- The rate is not limited (i.e., 100Gbps)
- The RTT between the sites is 26 milliseconds (DALL, SALT)
- BBRv1 and BBRv2 achieve throughputs over 70Gbps with eight streams


Streams	CUBIC		Reno		HTCP		BBRv1		BBRv2	
	1500	9000	1500	9000	1500	9000	1500	9000	1500	9000
1	0.624	2.5	0.542	2.09	0.612	1.67	10.2	15.4	9.35	17.7
2	1.36	3.9	1.42	3.35	1.56	3.36	21.9	33.3	18.7	31.7
4	3.58	7.84	3.13	5.31	5.77	6.08	35.5	37.2	28.9	42.1
8	9.77	9.93	8.05	9.21	9.01	11.5	32.7	70.1	40.6	73.8
16	11	14.5	8.88	13.5	11.7	13.7	41.2	86	47.6	77.8
32	11.9	18.8	11.8	17.5	12.8	18.5	47	71.3	49.5	78.3
64	12.8	66.9	12.6	22.8	17.1	76.7	44.8	79.4	44.9	80.3
120	17.2	75.7	16.1	68.2	20.5	72.5	44	67.9	43.1	77.2




Average throughput belonging to different CCAs as a function of the number of streams and the MTU.

# Results and Evaluations

- Experiment 5: Throughput as a function of packet losses
- The performance of BBRv2 is close to that of BBRv1 for loss rates less than 1%
- (a) RTT = 26ms (DALL, SALT)
- (b) RTT = 57ms (UCSD, UMASS)

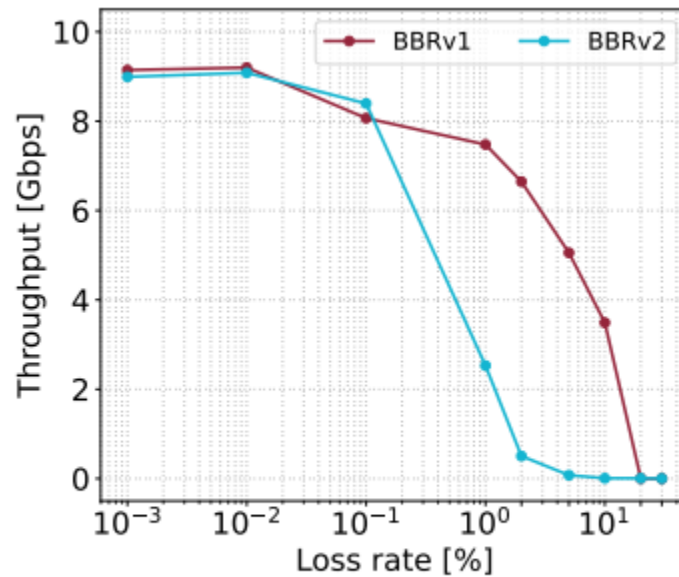


(a)

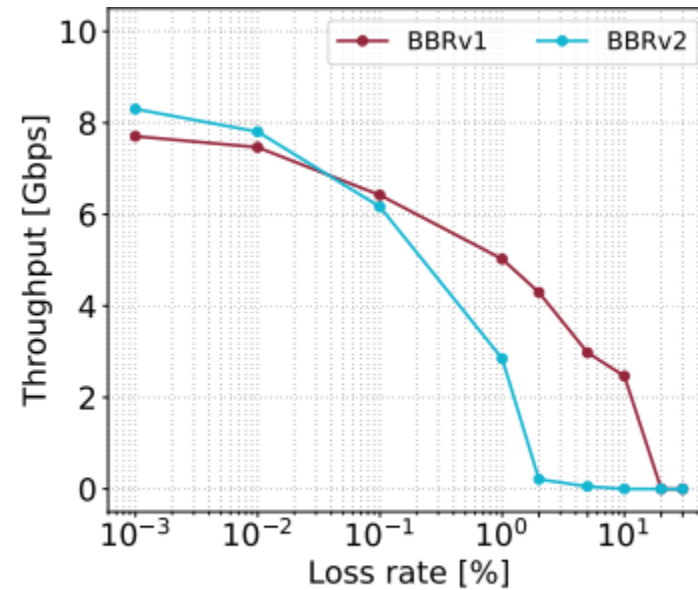

(b)

# Results and Evaluations

- Experiment 6: Queue occupancy
- Link is limited to 10Gbps, the RTT is 50ms
- Bandwidth-delay Product = 10Gbps \* 50ms = 62.5MB
- BBRv2 keeps the queue occupancy around BDP, even with bloated buffers

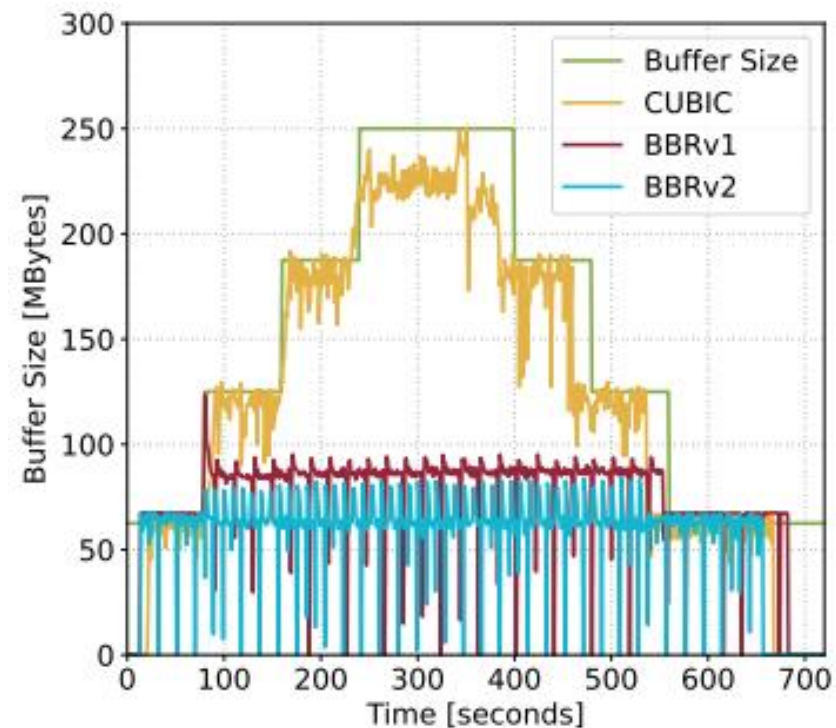

# Limitations

---

- Configuration of the intermediary devices (e.g., routers and switches)
  - Link capacity
  - Router buffer size
  - Queue allocation
- The experiments modified the buffer size of a software switch
- Shared Network Interface Cards (NICs)
- Performance isolation



# Lessons Learned

- FABRIC can be used to test protocols and applications under WAN conditions
- The testbed can support a wide variety of experiments
- Its programmable infrastructure allows defining customized network environments
- BBRv2 provides improved fairness compared to BBRv1, particularly when dealing with flows that have different RTTs
- BBRv2 can achieve comparable throughput to BBRv1, while also exhibiting a lower retransmission rate