



# Cybersecurity (Security+) and P4 Programmable Switches

## Lab 5: Introduction to Match-action Tables

Jose Gomez, Elie Kfoury, Jorge Crichigno  
University of South Carolina  
<http://ce.sc.edu/cyberinfra>


Western Academy Support and Training Center (WASTC)  
University of South Carolina (USC)  
Energy Sciences Network (ESnet)

June 22<sup>nd</sup>, 2023

# Lab 5: Introduction to Match-action Tables

# Match-action Pipeline

- Tables define the processing logic inside the match-action pipeline
- They can be used to implement traditional switch tables (e.g., routing, flow lookup, access-control lists)
- They can implement custom user-defined complex logic

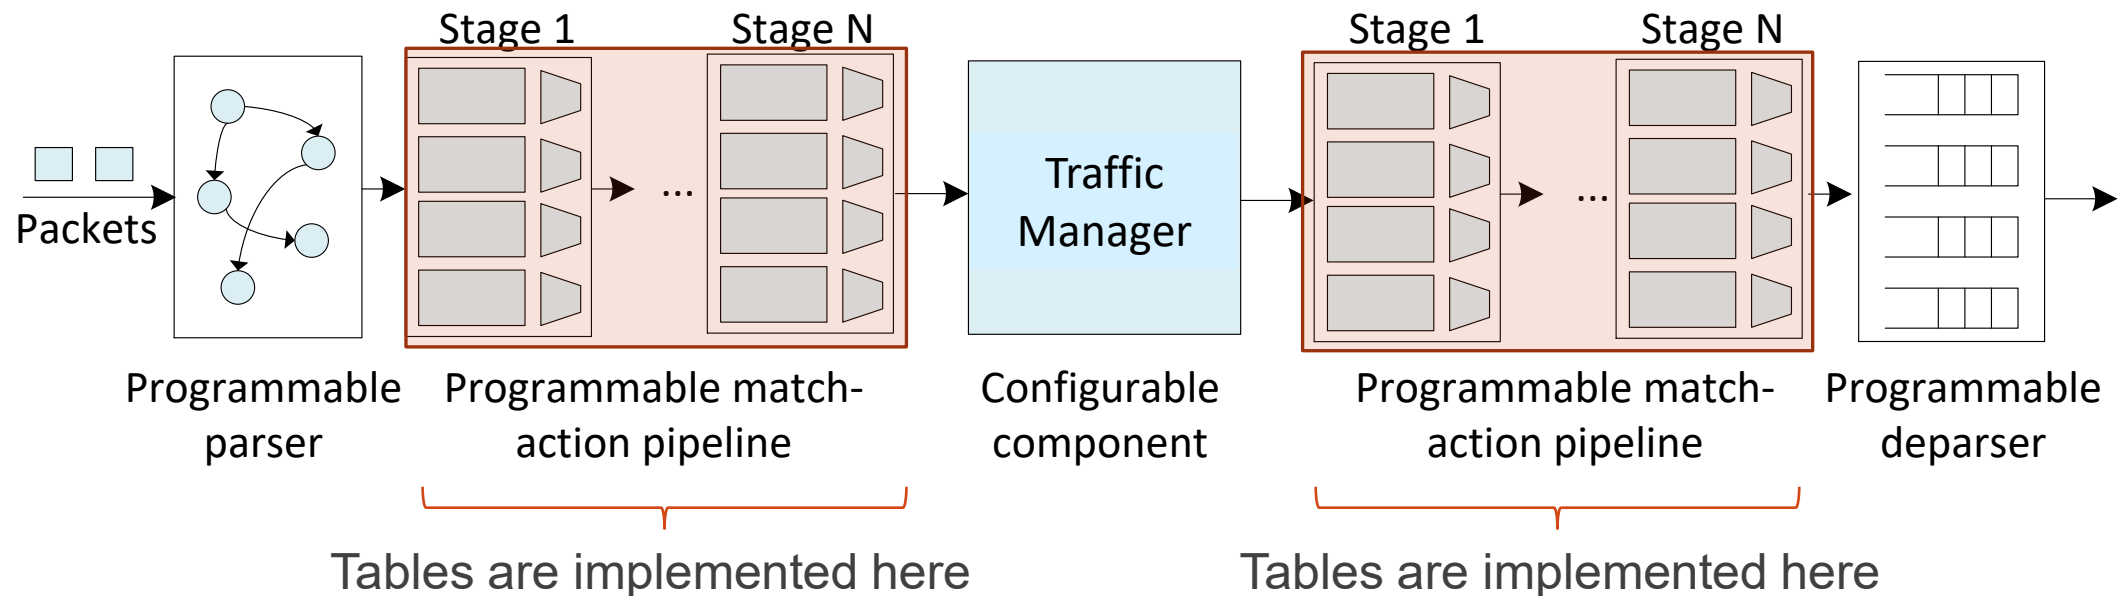

# Topology and Lab Objectives

- The topology consists of three hosts: h1, h2, and h3; one P4 switch: s1
- Implement a table that matches on the destination IP address in the packet headers using the Longest Prefix Match (LPM)
- Implement another table that matches on the destination IP address in the packet headers using the exact match
- Assign the output port based on the matched IP address
- Update the MAC addresses in the headers
- Decrement the Time-to-Live (TTL)

